



# **Diamond Pastes**


*for industrial polishing*

# Product Range :

| Color code     | Grain size (um) | Monocrystalline       | Policrystalline     |
|----------------|-----------------|-----------------------|---------------------|
|                | 90              | 01.03.90.00-XX-C-B    | 01.03.90.00P-XX-C-B |
|                | 75              | 01.03.75.00           | 01.03.75.00P        |
|                | 60              | 01.03.60.00           | 01.03.60.00P        |
|                | 45              | 01.03.45.00           | 01.03.45.00P        |
|                | 30              | 01.03.30.00           | 01.03.30.00P        |
|                | 25              | 01.03.25.00           | 01.03.25.00P        |
|                | 20              | 01.03.20.00           | 01.03.20.00P        |
|                | 15              | 01.03.15.00           | 01.03.15.00P        |
|                | 12              | 01.03.12.00           | 01.03.12.00P        |
|                | 9               | 01.03.9.00            | 01.03.9.00P         |
|                | 6               | 01.03.6.00            | 01.03.6.00P         |
|                | 3               | 01.03.3.00            | 01.03.3.00P         |
|                | 1               | 01.03.1.00            | 01.03.1.00P         |
|                | 0,5             | 01.03.0.50            | 01.03.0.50P         |
|                | 0,25            | 01.03.0.25            | 01.03.0.25P         |
|                | 0,1             | 01.03.0.01            | 01.03.0.01P         |
| SUFFIX (XX) :  |                 | 05 = 5 GRAMS SYRINGE  |                     |
|                |                 | 10 = 10 GRAMS SYRINGE |                     |
|                |                 | 20 = 20 GRAMS SYRINGE |                     |
| SUFFIX ( C ) : |                 | M = MEDIUM            |                     |
|                |                 | S = STANDARD          |                     |
|                |                 | H = HEAVY             |                     |
| SUFFIX ( B ) : |                 | W = WATER BASE        |                     |
|                |                 | O = OIL BASE          |                     |



Easy opening and best conservation thread-lock system

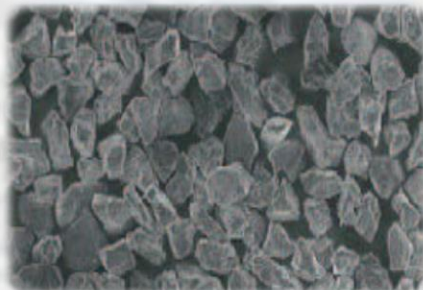

Certified HQ selected diamond powders, controlled by SEM



G&G Surface Technology  
Via Leonardo da Vinci , 6 – 27040 BOSNASCO (PV) - ITALY  
Tel 0385/272022 FAX 0385/272606  
[www.gegindustry.com](http://www.gegindustry.com)  
E-Mail : [info@gegindustry.com](mailto:info@gegindustry.com)